



# Satellite TV Finder (DVB-S2 & H.265)

## & Broadcast Switcher

KANGPUT Electronics Technology

## Satellite TV Finder (DVB-S/S2 H.265) & Broadcast Switcher & UVC Lamp & Emergency Lamp

### Product Catalog:

- |                                  |                                  |
|----------------------------------|----------------------------------|
| 1.KPT-736HD+ (S2+Plus)           | 2.KPT-255HD+ (S2+Plus)           |
| 3.KPT-359HD+ (S2+Plus)           | 4.KPT-736HD (S2)                 |
| 5.KPT-269HD (S2)                 | 6.KPT-255HD (S2)                 |
| 7.KPT-958HD (S2)                 | 8.KPT-268AH (S2)                 |
| 9.KPT-359HD (S2)                 | 10.KPT-968HD (S2)                |
| 11.KPT-356HD (S2)                | 12.KPT-268Z(G) (S)               |
| 13.KPT-968Z(G) (S)               | 14.KPT-351 (CCTV Test)           |
| 15.KPT-501Q (Broadcast Switcher) | 16.KPT-502Q (Broadcast Switcher) |
| 17.KPT-V6 (UVC Lamp)             | 18.KPT-V8 (Emergency Lamp)       |

# 7" IPS Portable Satellite TV Finder & HD & Coaxial CCTV Monitor



7Inch IPS TFT LCD screen (1024\*600).  
With TV & HD & AHD & AV input  
<Support DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

TV/AV key:

- ① Satellite TV finder(DVB-S2)
- ② HD input function.(HD Monitor)
- ③ AHD input function.(HD Coaxial Camera Test)
- ④ AV input function.(Monitor)

- DVB-S2 receiver;Live FTA digital picture and sound.
- Satellite TV TP signal and lock the signal alarm
- When lock signal.Find star signal quality ,Shows strength & quality & BER & PWR strength and quality readings
- Built-in speaker, Remote control function.
- With DC12V power output to CCTV
- Build-in Lithium battery(11.1V 2600mAh),Find satellite around 2.5 hours
- On satellite finder state , AV port outputs video and audio synchronously
- HD input:support 800\*480 to 1920\*1080(max:1080P)
- Plus+:Added AHD TVI CVI HD coaxial camera test
- Product size:180\*143\*50mm;Net weight:580g



## ➤➤➤ KPT-736HD+

### ● Satellite TV Finder (S2/MP4/H.265/AVS/AVS+)

**DVB-S/S2** < DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

- Frequency range:950MHz-2150MHz
- LNB power & switch:13V18V/22K / signal lock indicator
- Input impedance: 75Ω (F). LNB short-circuit protection
- DiSEqC:1.0, 1.1 & motor antenna: 1.2, USALS
- Build-in signal locked alarm
- Build-in satellite finder management,(Edit, delete and scan),Edit TP, Frequency, LNB switch, Symbol rate etc
- USB connection internet (by USB WiFi:7601 & 5370) , Youtube / Weather / LOCAL IPTV /XTREAM / upgrade by net.
- Menu: English; Polish; Arabic; French; Russian;Turkish; German;Portuguese; Spanish; Vietnamese; Indonesian

### ● HD Input: On HD input state

Support 800\*480 to 1920\*1080 (Max:1080P)

### ● AHD Input: Test CCTV camera

- Automatic display of HD AHD/TVI/CVI camera pixel
- 1.AHD:Support TVI AHD CVI coaxial HD camera video input,display picture (Max:8MP)
- 2.Analog coaxial CVB-S Video

### ● AV Input:(on AV state;TV state is AV output)

- Support video & audio & DC12V power test
- AV input (video & audio input monitor)



# 4.3" Handheld Satellite TV Finder & Coaxial CCTV Monitor



4.3Inch TFT LCD screen (480\*272).  
With TV & AHD & AV input  
<Support DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

TV/AV key:

- ① Satellite TV finder(DVB-S2)
- ② AHD input function.(HD Coaxial Camera Test)
- ③ AV input function.(Monitor)

- ▣ DVB-S2 receiver,Live FTA digital picture and sound.
- ▣ Satellite TV TP signal and lock the signal alarm
- ▣ When lock signal.Find star signal quality ,Shows strength & quality & BER & PWR strength and quality readings
- ▣ Built-in speaker, Remote control function.
- ▣ With DC12V power output to CCTV
- ▣ Built-in Lithium battery(11.1V 2200mAh),Find satellite around 2.5 hours
- ▣ On satellite finder state , AV & HD-Out port outputs video and audio synchronously
- ▣ Plus+:Added AHD TVI CVI HD coaxial camera test
- ▣ Product size:212\*123\*48mm;Net weight:540g



## ➤➤➤ KPT-255HD+

### ● Satellite TV Finder (S2/MP4/H.265/AVS/AVS+)

DVB-S/S2 < DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

- ▣ Frequency range:950MHz-2150MHz
- ▣ LNB power & switch:13V18V/22K / signal lock indicator
- ▣ Input impedance: 75Ω (F) LNB short-circuit protection
- ▣ DiSEqC:1.0, 1.1 & motor antenna: 1.2, USALS
- ▣ Build-in signal locked alarm
- ▣ Build-in satellite finder management,(Edit, delete and scan),Edit TP, Frequency, LNB switch, Symbol rate etc
- ▣ Protective glass on LCD panel,Trestle on behind the machine
- ▣ USB connection internet (by USB WiFi:7601 & 5370) , Youtube / Weather / LOCAL IPTV /XTREAM / upgrade by net.

▣ Menu: English; Polish; Arabic; French; Russian;Turkish; German;Portuguese; Spanish; Vietnamese; Indonesian  
Optional color: Black (front and rear cover) & blue (front and rear cover)

### ● AHD Input: Test CCTV camera

Automatic display of HD AHD/TVI/CVI camera pixel

- 1.AHD:Support TVI AHD CVI coaxial HD camera video input,display picture (Max:8MP)
- 2.Analog coaxial CVB-S Video

### ● AV Input:(on AV state;TV state is AV output)

- ▣ Support video & audio & DC12V power test
- ▣ AV input (video & audio input monitor)



# 3.5" Handheld Satellite TV Finder & Coaxial CCTV Monitor



3.5Inch TFT LCD screen (320\*240).  
 With TV & AHD & AV input  
 <Support DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

TV/AV key:

- ① Satellite TV finder(DVB-S2)
- ② AHD input function. (HD Coaxial Camera Test)
- ③ AV input function.(Monitor)

- ▣ DVB-S2 receiver;Live FTA digital picture and sound.
- ▣ Satellite TV TP signal and lock the signal alarm
- ▣ When lock signal.Find star signal quality ,Shows strength & quality & BER & PWR strength and quality readings
- ▣ Built-in speaker, Remote control function.
- ▣ With DC12V power output to CCTV
- ▣ Built-in Lithium battery(11.1V 2200mAh),Find satellite around 2.5 hours
- ▣ On satellite finder state , AV & HD-Out port outputs video and audio synchronously
- ▣ Plus+:Added AHD TVI CVI HD coaxial camera test
- ▣ Product size:181\*110\*40mm;Net weight:500g



## ➤➤➤ KPT-359HD+

### ● Satellite TV Finder (S2/MP4/H.265/AVS/AVS+)

**DVB-S/S2** < DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

- ▣ Frequency range:950MHz-2150MHz
- ▣ LNB power & switch:13V18V/22K / signal lock indicator
- ▣ Input impedance: 75Ω (F) LNB short-circuit protection
- ▣ DiSEqC:1.0, 1.1 & motor antenna: 1.2, USALS
- ▣ Build-in signal locked alarm
- ▣ Build-in satellite finder management,(Edit, delete and scan),Edit TP, Frequency, LNB switch, Symbol rate etc
- ▣ USB connection internet (by USB WiFi:7601 & 5370) , Youtube / Weather / LOCAL IPTV /XTREAM / upgrade by net.
- ▣ Menu: English; Polish; Arabic; French; Russian;Turkish; German;Portuguese; Spanish; Vietnamese; Indonesian

### ● AHD Input: Test CCTV camera

Automatic display of HD AHD/TVI/CVI camera pixel

- 1.AHD:Support TVI AHD CVI coaxial HD camera video input,display picture (Max:8MP)
- 2.Analog coaxial CVB-S Video

### ● AV Input:(on AV state;TV state is AV output)

- ▣ Support video & audio & DC12V power test
- ▣ AV input (video & audio input monitor)



# 7" Portable Satellite TV Finder & HD & Monitor



7Inch TFT LCD screen (1024\*600).  
With TV & HD & AV input  
<Support DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

TV/AV key:

- ① Satellite TV finder(DVB-S2)
- ② HD input function.(HD Monitor)
- ③ AV input function.(Monitor)

- ▣ DVB-S2 receiver,Live FTA digital picture and sound.
- ▣ Satellite TV TP signal and lock the signal alarm
- ▣ When lock signal.Find star signal quality ,Shows strength & quality & BER & PWR strength and quality readings
- ▣ Built-in speaker, Remote control function.
- ▣ With DC12V power output to CCTV
- ▣ Build-in Lithium battery(11.1V 2600mAh),Find satellite around 2.5 hours
- ▣ On satellite finder state . AV port outputs video and audio synchronously
- ▣ HD input:support 800\*480 to 1920\*1080(max:1080P)
- ▣ Product size:180\*143\*50mm;Net weight:580g

## ➤➤➤ KPT-736HD

### ● Satellite TV Finder (S2/MP4/H.265/AVS/AVS+)

**DVB-S/S2** < DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

- ▣ Frequency range:950MHz-2150MHz
- ▣ LNB power & switch:13V18V/22K / signal lock indicator
- ▣ Input impedance: 75Ω (F). LNB short-circuit protection
- ▣ DiSEqC:1.0, 1.1 & motor antenna: 1.2, USALS
- ▣ Build-in signal locked alarm
- ▣ Build-in satellite finder management,(Edit, delete and scan),Edit TP, Frequency, LNB switch, Symbol rate etc
- ▣ USB connection internet (by USB WiFi:7601 & 5370) , Youtube / Weather / LOCAL IPTV /XTREAM / upgrade by net.
- ▣ Support software upgrade & PVR & Games & IP Setting & Network Apps & DLNA Render

▣ Menu: English; Polish; Arabic; French; Russian,Turkish; German;Portuguese; Spanish; Vietnamese; Indonesian

### ● HD Input: On HD input state

Support 800\*480 to 1920\*1080 (Max:1080P)

### ● AV Input:(on AV state;TV state is AV output)

- ▣ Support video & audio & DC12V power test
- ▣ AV input (video & audio input monitor)



# 4.3" IPS Portable Satellite TV Finder & HD & Monitor



4.3Inch IPS TFT LCD screen (800\*480).  
With TV & HD & AV input  
<Support DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

TV/AV key:

- ① Satellite TV finder(DVB-S2)
- ② HD input function.(HD Monitor)
- ③ AV input function.(Monitor)

- ▣ DVB-S2 receiver;Live FTA digital picture and sound.
- ▣ Satellite TV TP signal and lock the signal alarm
- ▣ When lock signal.Find star signal quality ,Shows strength & quality & BER & PWR strength and quality readings
- ▣ Find star signal, digital tube synchronous display signal quality
- ▣ Built-in speaker, Remote control function.
- ▣ With DC12V power output to CCTV
- ▣ Build-in Lithium battery(7.4V 2600mAh),Find satellite around 2.5 hours
- ▣ On satellite finder state . AV port outputs video and audio synchronously
- ▣ Product size:124\*117\*44mm;Net weight:328g

## ➤➤➤ KPT-269HD

### ● Satellite TV Finder (S2/MP4/H.265/AVS/AVS+)

**DVB-S/S2** < DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

- ▣ Frequency range:950MHz-2150MHz
- ▣ LNB power & switch:13V/18V/22K / signal lock indicator
- ▣ Input impedance: 75Ω (F). LNB short-circuit protection
- ▣ DiSEqC:1.0, 1.1 & motor antenna: 1.2, USALS
- ▣ Build-in signal locked alarm
- ▣ Build-in satellite finder management,(Edit, delete and scan),Edit TP, Frequency, LNB switch, Symbol rate etc
- ▣ USB connection internet (by USB WiFi:7601 & 5370) , Youtube / Weather / LOCAL IPTV /XTREAM / upgrade by net.
- ▣ Support software upgrade & PVR & Games & IP Setting & Network Apps & DLNA Render

▣ Menu: English; Polish; Arabic; French; Russian;Turkish; German;Portuguese; Spanish; Vietnamese; Indonesian

### ● HD Input: On HD input state

Support 800\*480 to 1920\*1080 (Max:1080P)

### ● AV Input:(on AV state;TV state is AV output)

- ▣ Support video & audio & DC12V power test
- ▣ AV input (video & audio input monitor)



## 4.3" Handheld HD Satellite TV Finder &amp; Monitor



4.3Inch TFT LCD screen (480\*272).  
With TV & AV input  
<Support DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

## TV/AV key:

- ① Satellite TV finder(DVB-S2)
- ② AV input function.(Monitor)

- DVB-S2 receiver;Live FTA digital picture and sound.
- Satellite TV TP signal and lock the signal alarm
- When lock signal.Find star signal quality ,Shows strength & quality & BER & PWR strength and quality readings
- Find star signal, digital tube synchronous display signal quality
- Built-in speaker, Remote control function.
- With DC12V power output to CCTV
- Build-in Lithium battery(11.1V 2200mAh),Find satellite around 2.5 hours
- On satellite finder state , AV & HD-Out port outputs video and audio synchronously
- Product size:212\*123\*48mm;Net weight:540g



## KPT-255HD

## ● Satellite TV Finder (S2/MP4/H.265/AVS/AVS+)

**DVB-S/S2** < DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

- Frequency range:950MHz-2150MHz
- LNB power & switch:13V18V/22K / signal lock indicator
- Input impedance: 75Ω (F). LNB short-circuit protection
- DiSEqC:1.0, 1.1 & motor antenna: 1.2, USALS
- Build-in signal locked alarm
- Build-in satellite finder management,(Edit, delete and scan),Edit TP, Frequency, LNB switch, Symbol rate etc
- Protective glass on LCD panel,Trestle on behind the machine
- USB connection internet ( by USB WiFi:7601 & 5370) , Youtube / Weather / LOCAL IPTV /XTREAM / upgrade by net.
- Support software upgrade & PVR & Games & IP Setting & Network Apps & DLNA Render

▫Menu: English; Polish; Arabic; French; Russian;Turkish; German;Portuguese; Spanish; Vietnamese; Indonesian  
Optional color: Black (front and rear cover) & blue (front and rear cover)

## ● AV Input:(on AV state;TV state is AV output)

- Support video & audio & DC12V power test
- AV input (video & audio input monitor)





# 4.3" Portable HD Satellite TV Finder & Monitor



4.3Inch TFT LCD screen (480\*272).  
With TV & AV input  
<Support DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

#### TV/AV key:

- ① Satellite TV finder(DVB-S2)
- ② AV input function.(Monitor)

- ▣ DVB-S2 receiver;Live FTA digital picture and sound.
- ▣ Satellite TV TP signal and lock the signal alarm
- ▣ When lock signal.Find star signal quality ,Shows strength & quality & BER & PWR strength and quality readings
- ▣ Find star signal, digital tube synchronous display signal quality
- ▣ Built-in speaker, Remote control function.
- ▣ With DC12V power output to CCTV
- ▣ Build-in Lithium battery(11.1V 2200mAh),Find satellite around 2.5 hours
- ▣ On satellite finder state , AV & HD-Out port outputs video and audio synchronously
- ▣ Product size:180\*122\*48mm;Net weight:517g

## KPT-958HD

### ● Satellite TV Finder (S2/MP4/H.265/AVS/AVS+)

**DVB-S/S2** < DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

- ▣ Frequency range:950MHz-2150MHz
- ▣ LNB power & switch:13V18V/22K / signal lock indicator
- ▣ Input impedance: 75Ω (F). LNB short-circuit protection
- ▣ DiSEqC:1.0, 1.1 & motor antenna: 1.2, USALS
- ▣ Build-in signal locked alarm
- ▣ Build-in satellite finder management,(Edit, delete and scan),Edit TP, Frequency, LNB switch, Symbol rate etc
- ▣ Protective glass on LCD panel,Trestle on behind the machine
- ▣ USB connection internet (by USB WiFi:7601 & 5370) , Youtube / Weather / LOCAL IPTV /XTREAM / upgrade by net.
- ▣ Support software upgrade & PVR & Games & IP Setting & Network Apps & DLNA Render

▣ Menu: English; Polish; Arabic; French; Russian;Turkish; German;Portuguese; Spanish; Vietnamese; Indonesian  
Optional color: Black (front and rear cover) & yellow + blue (front and rear cover) & gold + black (front and rear cover)

### ● AV Input:(on AV state;TV state is AV output)

- ▣ Support video & audio & DC12V power test
- ▣ AV input (video & audio input monitor)



# 4.3" Portable HD Satellite TV Finder & Monitor

## ▶▶▶ KPT-268AH

### ● Satellite TV Finder (DVB-S/S2 MP4)

#### DVB-S/S2 < DVB-S/S2 MP4 >

- ▣ Frequency range: 950MHz-2150MHz
- ▣ LNB power & switch: 13V/18V/22K / signal lock indicator
- ▣ Input impedance: 75Ω (F). LNB short-circuit protection
- ▣ DiSEqC: 1.0, 1.1 & motor antenna: 1.2, USALS
- ▣ Build-in signal locked alarm
- ▣ Build-in satellite finder management, (Edit, delete and scan), Edit TP, Frequency, LNB switch, Symbol rate etc
- ▣ Used for the wrist strap of gloves to hold satellite finder
- ▣ With safety wrist rope and compass
- ▣ USB connection internet (by USB WiFi: 7601 & 5370), Youtube / Weather / LOCAL IPTV / XTREAM / upgrade by net.
- ▣ Support software upgrade & PVR & Games & IP Setting & Network Apps & DLNA Render

- ▣ Menu: English; Polish; Arabic; French; Russian; Turkish; German; Portuguese; Spanish; Vietnamese; Indonesian

### ● AV Input: (on AV state; TV state is AV output)

- ▣ Support video & audio & DC12V power test
- ▣ AV input (video & audio input monitor)



4.3Inch TFT LCD screen (480\*272).  
With TV & AV input  
<Support DVB-S/S2 MP4>

#### TV/AV key:

- ① Satellite TV finder (DVB-S2)
- ② AV input function. (Monitor)

- ▣ DVB-S2 receiver; Live FTA digital picture and sound.
- ▣ Satellite TV TP signal and lock the signal alarm
- ▣ When lock signal. Find star signal quality, Shows strength & quality strength and quality readings
- ▣ Find star signal, digital tube synchronous display signal quality
- ▣ Built-in speaker, Remote control function.
- ▣ With DC12V power output to CCTV
- ▣ Build-in Lithium battery (7.4V 2600mAh), Find satellite around 2 hours
- ▣ On satellite finder state, AV & HD-Out port outputs video and audio synchronously
- ▣ Product size: 124\*117\*44mm; Net weight: 328g



# 3.5" Handheld HD Satellite TV Finder & Monitor



3.5Inch TFT LCD screen (320\*240).  
 With TV & AV input  
 <Support DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

TV/AV key:

- ① Satellite TV finder(DVB-S2)
- ② AV input function.(Monitor)

- DVB-S2 receiver;Live FTA digital picture and sound.
- Satellite TV TP signal and lock the signal alarm
- When lock signal.Find star signal quality ,Shows strength & quality & BER & PWR strength and quality readings
- Find star signal, digital tube synchronous display signal quality
- Built-in speaker, Remote control function.
- With DC12V power output to CCTV
- Build-in Lithium battery(11.1V 2200mAh),Find satellite around 2.5 hours
- On satellite finder state , AV & HD-Out port outputs video and audio synchronously
- Product size:181\*110\*40mm;Net weight:500g

## ➤➤➤ KPT-359HD

### ● Satellite TV Finder (S2/MP4/H.265/AVS/AVS+)

**DVB-S/S2** < DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

- Frequency range:950MHz-2150MHz
- LNB power & switch:13V18V/22K / signal lock indicator
- Input impedance: 75Ω (F). LNB short-circuit protection
- DiSEqC:1.0, 1.1 & motor antenna: 1.2, USALS
- Build-in signal locked alarm
- Build-in satellite finder management,(Edit, delete and scan),Edit TP, Frequency, LNB switch, Symbol rate etc
- Protective glass on LCD panel,Trestle on behind the machine
- USB connection internet (by USB WiFi:7601 & 5370) , Youtube / Weather / LOCAL IPTV /XTREAM / upgrade by net.
- Support software upgrade & PVR & Games & IP Setting & Network Apps & DLNA Render

- Menu: English; Polish; Arabic; French; Russian;Turkish; German;Portuguese; Spanish; Vietnamese; Indonesian

### ● AV Input:(on AV state;TV state is AV output)

- Support video & audio & DC12V power test
- AV input (video & audio input monitor)



## 3.5" Handheld HD Satellite TV Finder &amp; Monitor



3.5Inch TFT LCD screen (320\*240)  
With TV & AV input  
< Support DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

TV/AV key:

- ① Satellite TV finder(DVB-S2)
- ② AV input function.(Monitor)

- DVB-S2 receiver; Live FTA digital picture and sound.
- Satellite TV TP signal and lock the signal alarm
- When lock signal. Find star signal quality, Shows strength & quality & BER & PWR strength and quality readings
- Find star signal, digital tube synchronous display signal quality
- Built-in speaker, With DC12V power output to CCTV
- Built-in Lithium battery(11.1V 2200mAh), Find satellite around 2.5 hours
- On satellite finder state, AV & HD-Out port outputs video and audio synchronously
- Product size:170\*110\*41mm; Net weight:480g

▫ Optional "KPT-358HD":

Protective glass on LCD panel.



## ➤➤➤ KPT-968HD

### ● Satellite TV Finder (S2/MP4/H.265/AVS/AVS+)

**DVB-S/S2** < DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

- Frequency range:950MHz-2150MHz
- LNB power & switch:13V18V/22K / signal lock indicator
- Input impedance: 75Ω (F). LNB short-circuit protection
- DiSEqC:1.0, 1.1 & motor antenna: 1.2, USALS
- Build-in signal locked alarm
- Build-in satellite finder management.(Edit, delete and scan), Edit TP, Frequency, LNB switch, Symbol rate etc
- Protective glass on LCD panel, Trestle on behind the machine
- USB connection internet (by USB WiFi:7601 & 5370), Youtube / Weather / LOCAL IPTV /XTREAM / upgrade by net.
- Support software upgrade & PVR & Games & IP Setting & Network Apps & DLNA Render

▫ Menu: English; Polish; Arabic; French; Russian;Turkish; German;Portuguese; Spanish; Vietnamese; Indonesian

Optional :Protective glass on LCD panel(Model:KPT-358HD)

Optional: Remote control function

### ● AV Input:(on AV state;TV state is AV output)

- Support video & audio & DC12V power test
- AV input (video & audio input monitor)



# 3.5" Handheld HD Satellite TV Finder



3.5Inch TFT LCD screen (320\*240)  
**Only Satellite TV input** (without AV input)  
 < Support DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

## Satellite TV Finder(DVB-S2)

- DVB-S2 receiver,Live FTA digital picture and sound.
- When lock signal. Find star signal quality, Shows strength & quality & BER & PWR strength and quality readings, lock the signal alarm.
- Built-in speaker,The whole process requires remote control, and the panel has no button operation.
- Build-in Lithium battery(7.4V 2600mAh),Find satellite around 2 hours.
- Satellite finder state, HD-Out port outputs video and audio synchronously
- Protective glass on LCD panel.
- Product size:90\*83\*47mm;Net weight:258g



## KPT-356HD

### Satellite TV Finder (S2/MP4/H.265/AVS/AVS+)

**DVB-S/S2** < DVB-S/S2 MP4 HEVC(H.265) AVS/AVS+>

- Frequency range:950MHz-2150MHz
- LNB power & switch:13V18V/22K / signal lock indicator
- Input impedance: 75Ω (F). LNB short-circuit protection
- DiSEqC:1.0, 1.1 & motor antenna: 1.2, USALS
- Build-in satellite finder management,(Edit, delete and scan),Edit TP, Frequency, LNB switch, Symbol rate etc
- Protective glass on LCD panel,Used for the wrist strap of gloves to hold satellite finder
- USB connection internet (by USB WiFi:7601 & 5370) , Youtube / Weather / LOCAL IPTV /XTREAM / upgrade by net.
- Support software upgrade & PVR & Games & IP Setting & Network Apps & DLNA Render
- Menu: English; Polish; Arabic; French; Russian;Turkish; German;Portuguese; Spanish; Vietnamese; Indonesian

## 3.5" Handheld Satellite TV Finder &amp; Monitor



## KPT-968Z

## ● Satellite TV Finder (S)

## DVB-S

- ▣ Frequency range: 950MHz-2150MHz
- ▣ LNB power & switch: 13V/18V/22K / signal lock indicator
- ▣ Input impedance: 75Ω (F). LNB short-circuit protection
- ▣ DiSEqC: 1.0 & 1.2 edition
- ▣ Build-in signal locked alarm
- ▣ Live FTA digital pictures and sounds.
- ▣ Build-in satellite finder management, (Edit, delete and scan), Edit TP, Frequency, LNB switch, Symbol rate etc
- ▣ USB upgrade: edited USB docking RS232
- ▣ Menu: Chinese/English /French /Arabic/Turkey/Russian

Optional : Protective glass on LCD panel (Model: KPT-358Z)

Optional: Remote control function.

3.5Inch TFT LCD screen (320\*240)

With TV & AV input

< Support DVB-S>

TV/AV key:

- ① Satellite TV finder (DVB-S)
- ② AV input function. (Monitor)

- ▣ Support DVB-S (MPEG-2) satellite signal video decoding.
- ▣ Support DVB-S2/MPEG-4/CBS-2(HD)/ABS-S signal display test.
- ▣ Find satellite signal alarm and signal enlarge display.
- ▣ Find star signal quality LED displayed, INFO article shows of signal shape, with enlarge images
- ▣ Warning sound change: the faster pace, signal is stronger
- ▣ Live FTA digital pictures and sounds (DVB-S).
- ▣ Function: strongest signal locked and auto/blind/TP scan.
- ▣ Built-in speaker, Remote control function.
- ▣ With DC12V power output to CCTV
- ▣ Build-in Lithium battery (11.1V 2200mAh), Find satellite around 2.5 hours
- ▣ On satellite finder state, AV port outputs video and audio synchronously
- ▣ Product size: 170\*110\*41mm; Net weight: 480g

## ● AV Input: (on AV state; TV state is AV output)

- ▣ Support video & audio & DC12V power test
- ▣ AV input (video & audio input monitor)



## ▣ Optional "KPT-358Z":

Protective glass on LCD panel.



# 4.3" Protatable Satellite TV Finder & Monitor

## ▶▶▶ KPT-268Z



### ● Satellite TV Finder (DVB-S)

#### DVB-S < DVB-S>

- ▣ Frequency range: 950MHz-2150MHz
- ▣ LNB power & switch: 13V/18V/22K / signal lock indicator
- ▣ Input impedance: 75Ω (F). LNB short-circuit protection
- ▣ DiSEqC: 1.0 & 1.2 edition
- ▣ Build-in signal locked alarm
- ▣ Build-in satellite finder management, (Edit, delete and scan), Edit TP, Frequency, LNB switch, Symbol rate etc
- ▣ Upgrade: edited USB docking RS232
- ▣ Remote control function; Comes with horn and compass for debugging use
- ▣ Menu: Chinese/English /French /Arabic/Turkey/Russian.

### ● AV Input: (on AV state; TV state is AV output)

- ▣ Support video & audio & DC12V power test
- ▣ AV input (video & audio input monitor)

4.3Inch TFT LCD screen (480\*272).  
With TV & AV input  
<Support DVB-S/S2 MP4>

#### TV/AV key:

- ① Satellite TV finder (DVB-S)
- ② AV input function. (Monitor)

- ▣ Support DVB-S (MPEG-2) satellite signal video decoding.
- ▣ Support DVB-S2/MPEG-4/CBS-2(HD)/ABS-S signal display test.
- ▣ Find satellite signal alarm and signal enlarge display.
- ▣ Find star signal quality LED displayed,  
INFO article shows of signal shape, with enlarge images
- ▣ Warning sound change: the faster pace, signal is stronger
- ▣ Live FTA digital pictures and sounds (DVB-S).
- ▣ Function: strongest signal locked and auto/blind/TP scan.
- ▣ Built-in speaker, Remote control function.
- ▣ With DC12V power output to CCTV
- ▣ Build-in Lithium battery (7.4V 2600mAh), Find satellite around 2 hours
- ▣ On satellite finder state, AV port outputs video and audio synchronously
- ▣ Product size: 124\*117\*44mm; Net weight: 330g



## 3.5" Handheld Coaxial CCTV Monitor Test

## KPT-351+


**CCTV & Video Input:**

- Automatic display of HD AHD/TVI/CVI camera pixel  
 With DC 12V synchronization output to camera start
- 1.AHD:Support TVI AHD CVI coaxial HD (720P 960P 1080P) camera video input,display picture (Max:8MP)
  - 2.Analog coaxial CVB-S Video
  - 3.Analog video input,dispay picture

**Panel Key:**

- LAMP:Open flashlight lamp  
 MENU:Brightness, Contrast, Color, Hue, Language  
 +:Turn up, Move the cursor right  
 -:Turn down, Move the cursor left

3.5Inch TFT LCD screen (320\*240).  
 With Video input  
 <Support HD & Analog Coaxial CCTV Camera>

- ▣3.5"high-resolution digital display LCD( LED Back Light)
- ▣Dots pixels:320\*240(339840Pixes)
- ▣Color system: PAL/NTSC
- ▣Protective glass on LCD panel
- ▣Arm cover on behind the machine
- ▣Battery indicator light show
- ▣Lithium battery: DC 3.7V 2600mAh(build-in)
- ▣Input voltage:DC5V 1A
- ▣Output voltage:DC12V
- ▣Support Video &DC12V power test
- ▣With DC12V power output to CCTV
- ▣Battery play time: about 5 hours
- ▣Plus+:Added AHD TVI CVI HD coaxial camera test
- ▣Product size:93\*85\*45 mm; Net weight:192g





## Quad HD Broadcast Switcher With 5 Inch LCD Display

## KPT-501Q



## Introduction &amp; Features

Multi-functional 4-channel HDMI professional switchboard, mini design, built-in 5" full HD LCD, can directly view the multi-picture signal and flexible menu operation, operation of the five-way rocker and knob for motion control of multiple PTZ cameras.

The audio and video switching station is designed based on FPGA hardware platform, supporting video effects switching, green screen cutting, audio mixing and adjustment, PIP/POP at any position and size, LOGO and other broadcast functions. At the same time, the machine contains powerful multimedia functions to support UVC push stream, live recording and direct multichannel network push stream.

- Easy to carry with mini size
- Easy to monitor and preview with 5" wide gamut FHD LCD
- Quad HDMI inputs, Dual HDMI outputs for PGM, One UVC streaming
- Dual audio inputs, support both Line-in and mic
- One audio output, with selectable sources
- T-bar switching, more than 30 effects
- Film grade chroma keying
- Inner media library, supports user defined pictures and imported pictures
- Logo with alpha channel, supports PNG format
- Flexible layers switching, each with position, size, chroma key and mask
- FTB and image freezing
- Five way rocker for agilely controlling PTZ
- Focus, white balance, position for PTZ control
- Local video recording
- RTMP multi live broadcast platform, with adjustable code rate and one key streaming
- Agilely control with web on PCs and phones, without additional installation.
- Products size: 200\*123\*45mm; Net weight: 670g



# HD Broadcast Switcher 4-Channel Professional

## ➤➤➤ KPT-502Q



### ● Introduction & Features


Multi-functional 4-channel HDMI professional switchboard, mini design, without LCD display, only output other HD monitor display, the multi-picture signal and flexible menu operation, operation of the five-way rocker and knob for motion control of multiple PTZ cameras.

The audio and video switching station is designed based on FPGA hardware platform, supporting video effects switching, green screen cutting, audio mixing and adjustment, PIP/POP at any position and size, LOGO and other broadcast functions. At the same time, the machine contains powerful multimedia functions to support UVC push stream, live recording and direct multichannel network push stream.

- Easy to carry with mini size
- Quad HDMI inputs, Dual HDMI outputs for PGM, One UVC streaming
- Dual audio inputs, support both Line-in and mic
- One audio output, with selectable sources
- T-bar switching, more than 30 effects
- Film grade chroma keying
- Inner media library, supports user defined pictures and imported pictures
- Logo with alpha channel, supports PNG format
- Flexible layers switching, each with position, size, chroma key and mask
- FTB and image freezing
- Five way rocker for agilely controlling PTZ
- Focus, white balance, position for PTZ control
- Local video recording
- RTMP multi live broadcast platform, with adjustable code rate and one key streaming
- Agilely control with web on PCs and phones, without additional installation.
- Products size: 200\*123\*45mm; Net weight: 670g



# Disinfection LED UVC Ultraviolet Portable Light Sterilizer UVC Lamp

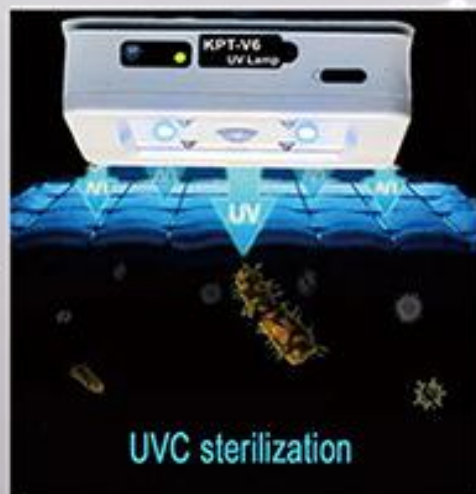

## KPT-V6

### Ultraviolet disinfection

UV travel sterilizer ultraviolet sterilizer UV pocket Wand/UVC germ killing machine portable sanitizin. Disinfection LED UVC ultraviolet portable light sterilizer UV lamp

This is a simple portable UV sterilizer. It consists of 4 LED beads for disinfect purpose. Four of them are germicidal LED lamp (UVC 270-280 nm) beads, which will provide maximum power to kill 99.9% germs in 10min, while keep the UV exposure level in a safe level for hand holding. The other 2 beads are ambient light (UV 400nm), which can help tracing the disinfection area.

Lamp specification:

\*Blue light: disinfection light, when the beginning of disinfection four big and two small (six lights) light up.

\*Red light: alarm light, when disinfection, personnel close near, light flashing warning.

\*White is the infrared sensor head: it is specially used for work monitoring personnel proximity function Charging voltage/ time: DC5V 1A (3-5H)

Battery type: 18650 lithium battery 3.7V 2A h

UV wavelength: 270-280nm

Radiate power: 32mw

Charging type: USB Cable power supply

Products size: 94\*72\*28mm; Net weight: 106g



## Portable LED Emergency Light & Power Bank (Red And Blue Alarm Lights)

### ▶▶▶ KPT-V8



#### ● Portable emergency light & power bank

Suitable for mining, outdoor camping, wild night fishing, night self-driving anchor emergency flashing rescue lights, night construction, home power failure emergency lights! quality assurance.

When receiving the charging light, the default gear is the standard brightness, the second gear is the highlight, the third gear is the emergency rescue flash (not indiscriminate use under special circumstances), and the fourth gear is the charging function, which directly charges the mobile phone through the charging line. Both pass the function button in the top corner of the panel "M". Battery overcharge protection, short circuit protection, low voltage protection

#### Lamp specification:

With wall - mounted holes.

Two gear brightness adjustment, SOS yellow and blue flash, emergency power bank function.

#### Lamp number :

12 Lamp beads(5730)pure white(6000K-6500K)

4 Lamp beads(2835)pure red (6000K-6500K) +

4 Lamp beads(2835)pure blue (6000K-6500K)

#### Working hours:

M 1: Standard lights about 5 hours

M 2: High lighting about 3 hours

M 3: SOS (Red and blue light warning)

M 4: Mobile charger function 5V 2 Ah

Charging voltage/ time:DC5V 1A (3-5H)

Battery type:18650 lithium battery 3.7V 2A h

Charging type:USB Cable power supply

Products size:94\*72\*28mm;Net weight:104g





**KA//GP**  
KANGPUT TECHNOLOGY

---

**KANGPUT Electronics Technology Co., Limited(HK)**

Add: LanTian Industrial Zone,ZhangZhou,FuJian,China

E-mail: sales@kangput.com    kpt01@kangput.com  
          kpt02@kangput.com    kangput@163.com

Web: www.kangput.com            Skype: kangput    kangput2

Tel: 0086-596-2106072 0086-596-2109072

---

